


FULLBODY
TILES

DENSE
SERIES

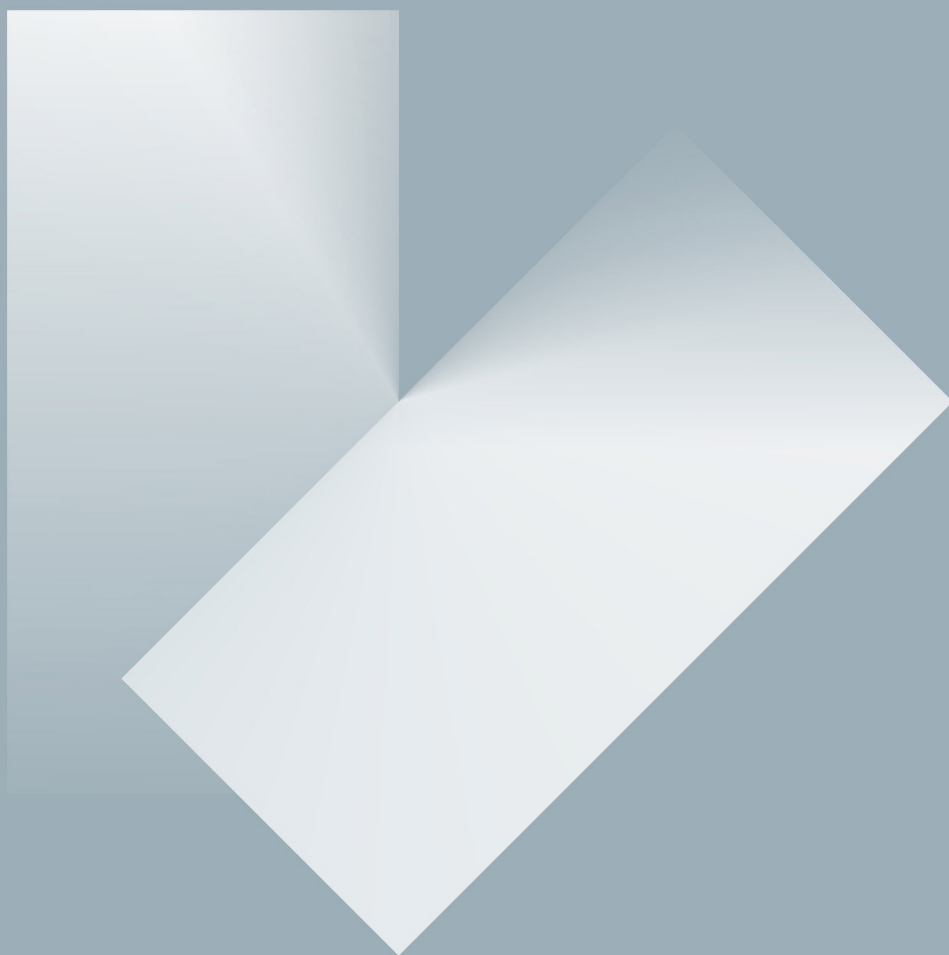

The Fullbody Wonder:
Where Luxury Lives Longer

600x1200mm, 15mm

VELBON
VITRIFIED

Introducing Surface Story

Narrated By Nature

Each surface tells a story shaped by nature's rhythm, textures, and depth. Inspired by raw materials, these tiles capture organic movement and timeless character, bringing a sense of authenticity, calm, and refined elegance into thoughtfully designed spaces.

Size

Designed in versatile formats that adapt seamlessly to varied spaces, offering flexibility in layout planning while maintaining harmony.

Finish

Refined finishes enhance the tactile and visual appeal, delivering a balanced surface that complements every interior.

Fullbody

Uniform composition throughout the thickness ensures the surface retains its original look even after continuous usage.

Thickness

Optimal thickness offers structural stability, making tiles suitable for high-traffic areas without compromising on aesthetics or performance.

www.velbonvitrified.com

VELBON
VITRIFIED





FULLBODY
TILES

DENSE
SERIES

VELBON
VITRIFIED

A curated palette of thoughtfully developed shades designed to complement evolving design sensibilities. Each tone reflects balance, depth, and subtle texture, allowing spaces to feel composed and refined. These surfaces blend effortlessly into diverse interiors while maintaining a distinct visual identity that enhances overall spatial harmony.



S H A D E S



**To Elevate
Spaces**

600x1200mm

Available In
Satin Finish

Carefully engineered finishes deliver consistent texture and visual depth, ensuring every shade performs beautifully across residential and commercial applications while retaining its original appeal over time.



Quality Raw Materials

Crafted using superior-grade materials to ensure lasting strength, consistent performance, and refined surface quality.



Versatile for Any Project

Designed to adapt seamlessly across residential and commercial spaces with balanced aesthetics and reliable functionality.



Non-Absorbent

Engineered to resist moisture penetration, helping maintain hygiene, durability, and long term surface integrity.



Frost Resistant

Built to withstand temperature variations, ensuring stability and performance even in colder environmental conditions



Heat Resistant

Capable of handling high temperatures without affecting surface strength, structure, or visual appeal.



No Color Alteration

Maintains original shade and texture over time, resisting fading and preserving its intended design look.



Easy Work Ability

Allows smooth cutting and installation, ensuring precision application with minimal effort during execution.



Resistant to Heavy Loads

Strong body composition supports high load-bearing, making it suitable for demanding usage areas.



Easy-to-Clean

Smooth surface enables effortless cleaning, reducing maintenance while keeping spaces fresh and presentable.



Hygienic Surface

Designed to support cleaner environments by preventing the accumulation of dust and unwanted surface particles.



Scratch & Abrasion Resistant

Durable finish protects against daily wear, maintaining surface quality even under frequent usage.



Resistant To Liquids & Acids

Performs well against spills and chemical exposure, protecting the surface from stains and damage.




Non-Toxic and Microplastic-free Slabs

Safe surface composition ensures a healthier environment, free from harmful emissions or micro residues.



Surface Suitable for Food Contact

Carefully developed to be safe for surfaces that interact with food, ensuring hygiene and reliability.

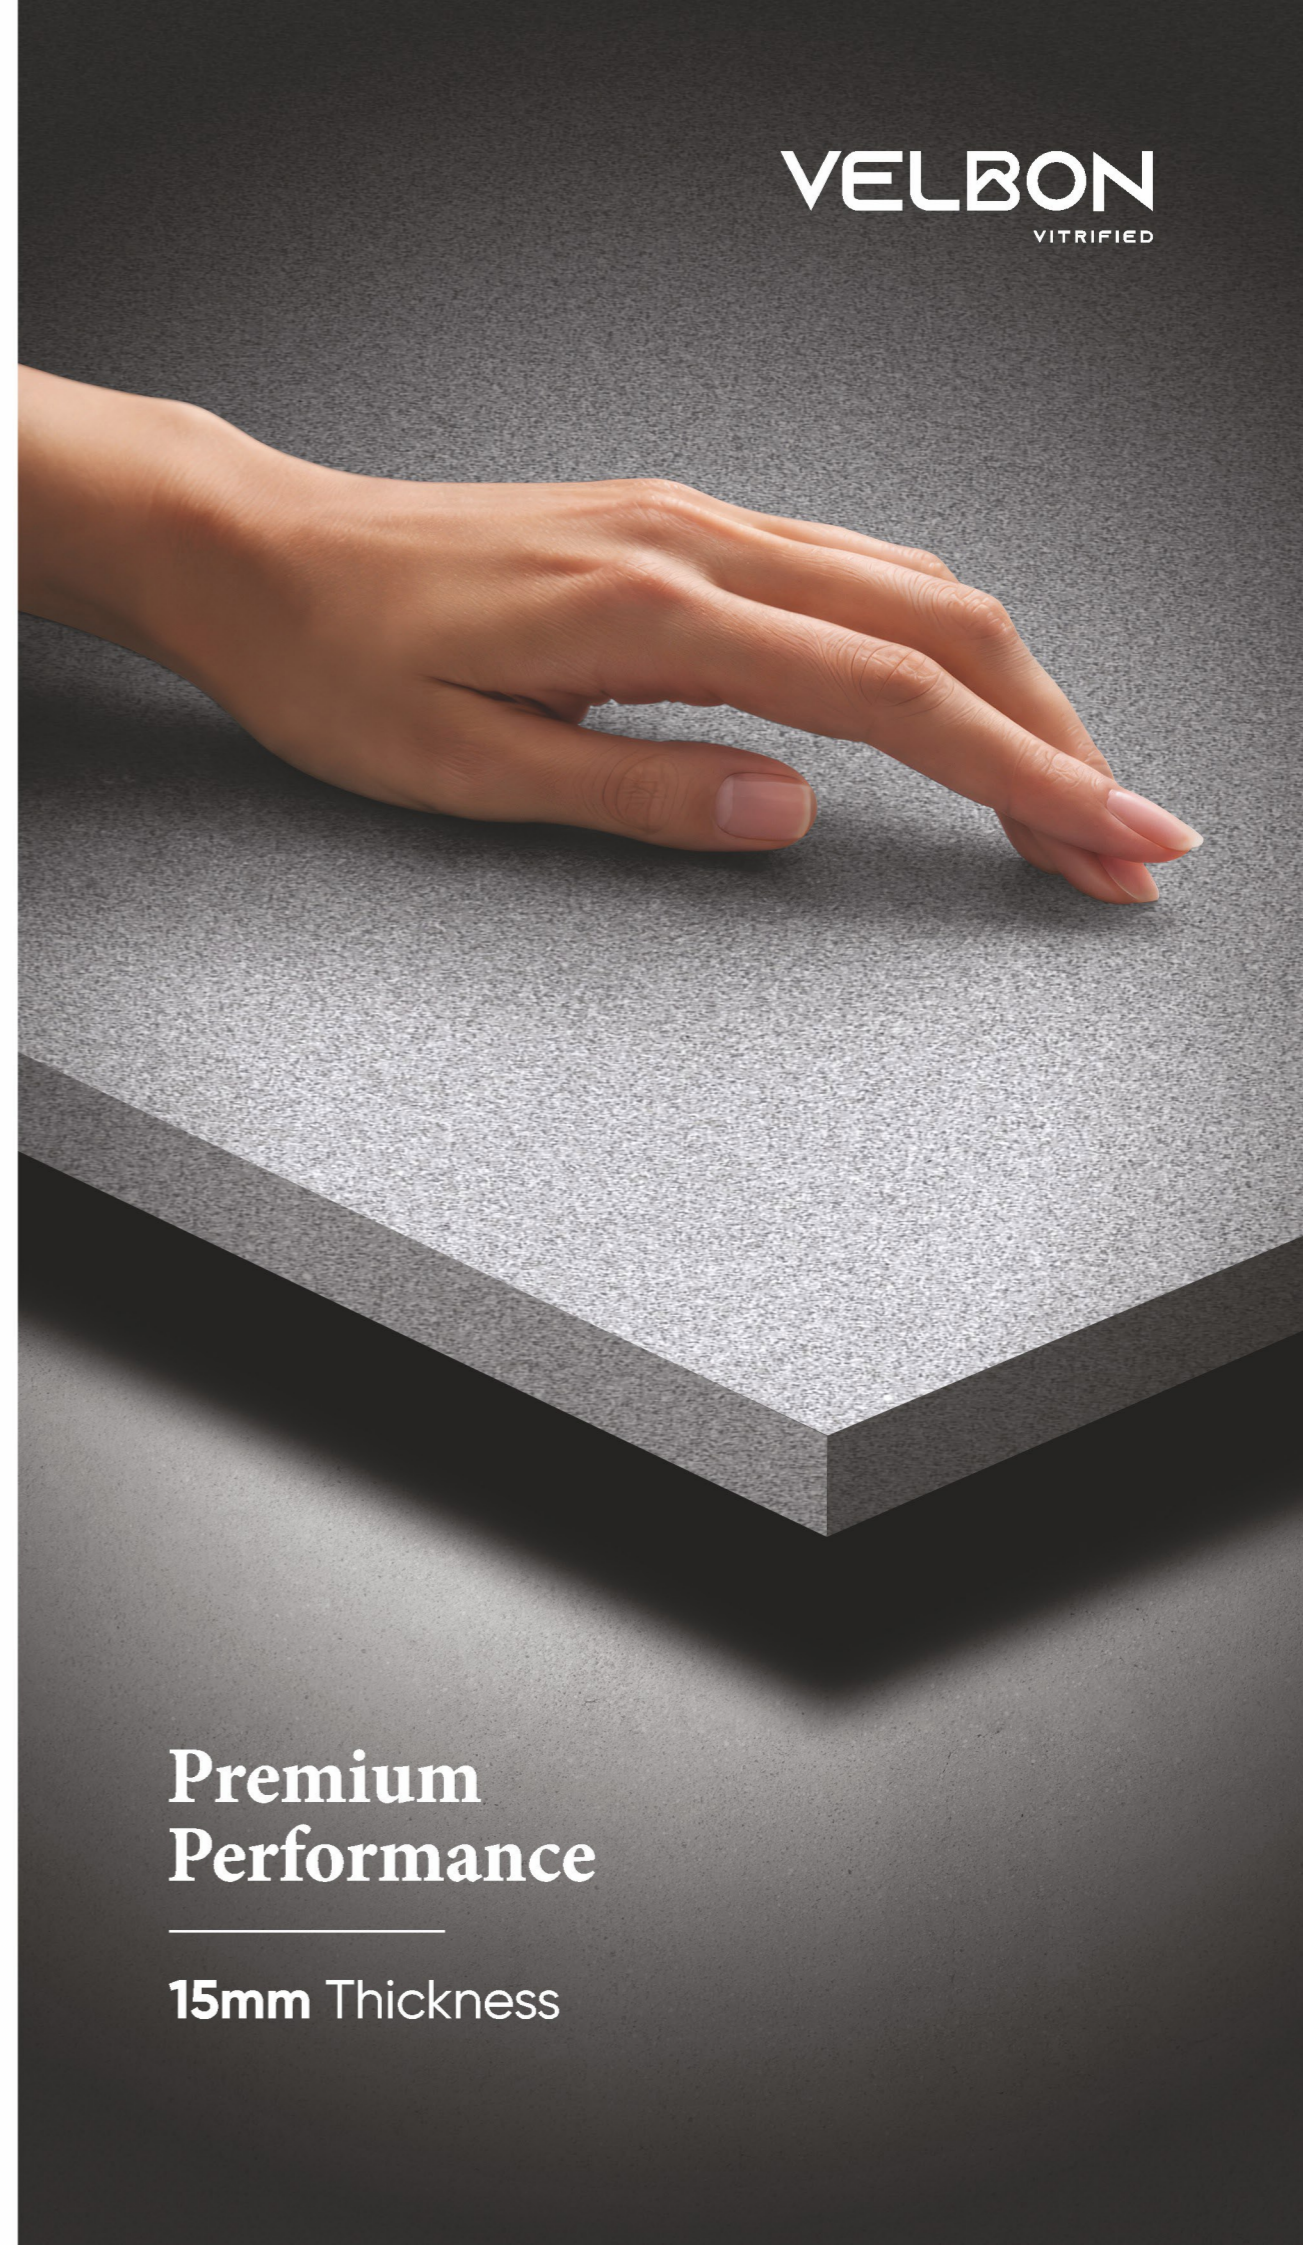

Premium Performance

15mm Thickness

FULLBODY
TILES



600x1200mm

SURFACE.
SATIN



www.velbonvitrified.com

DENSE COFFEE

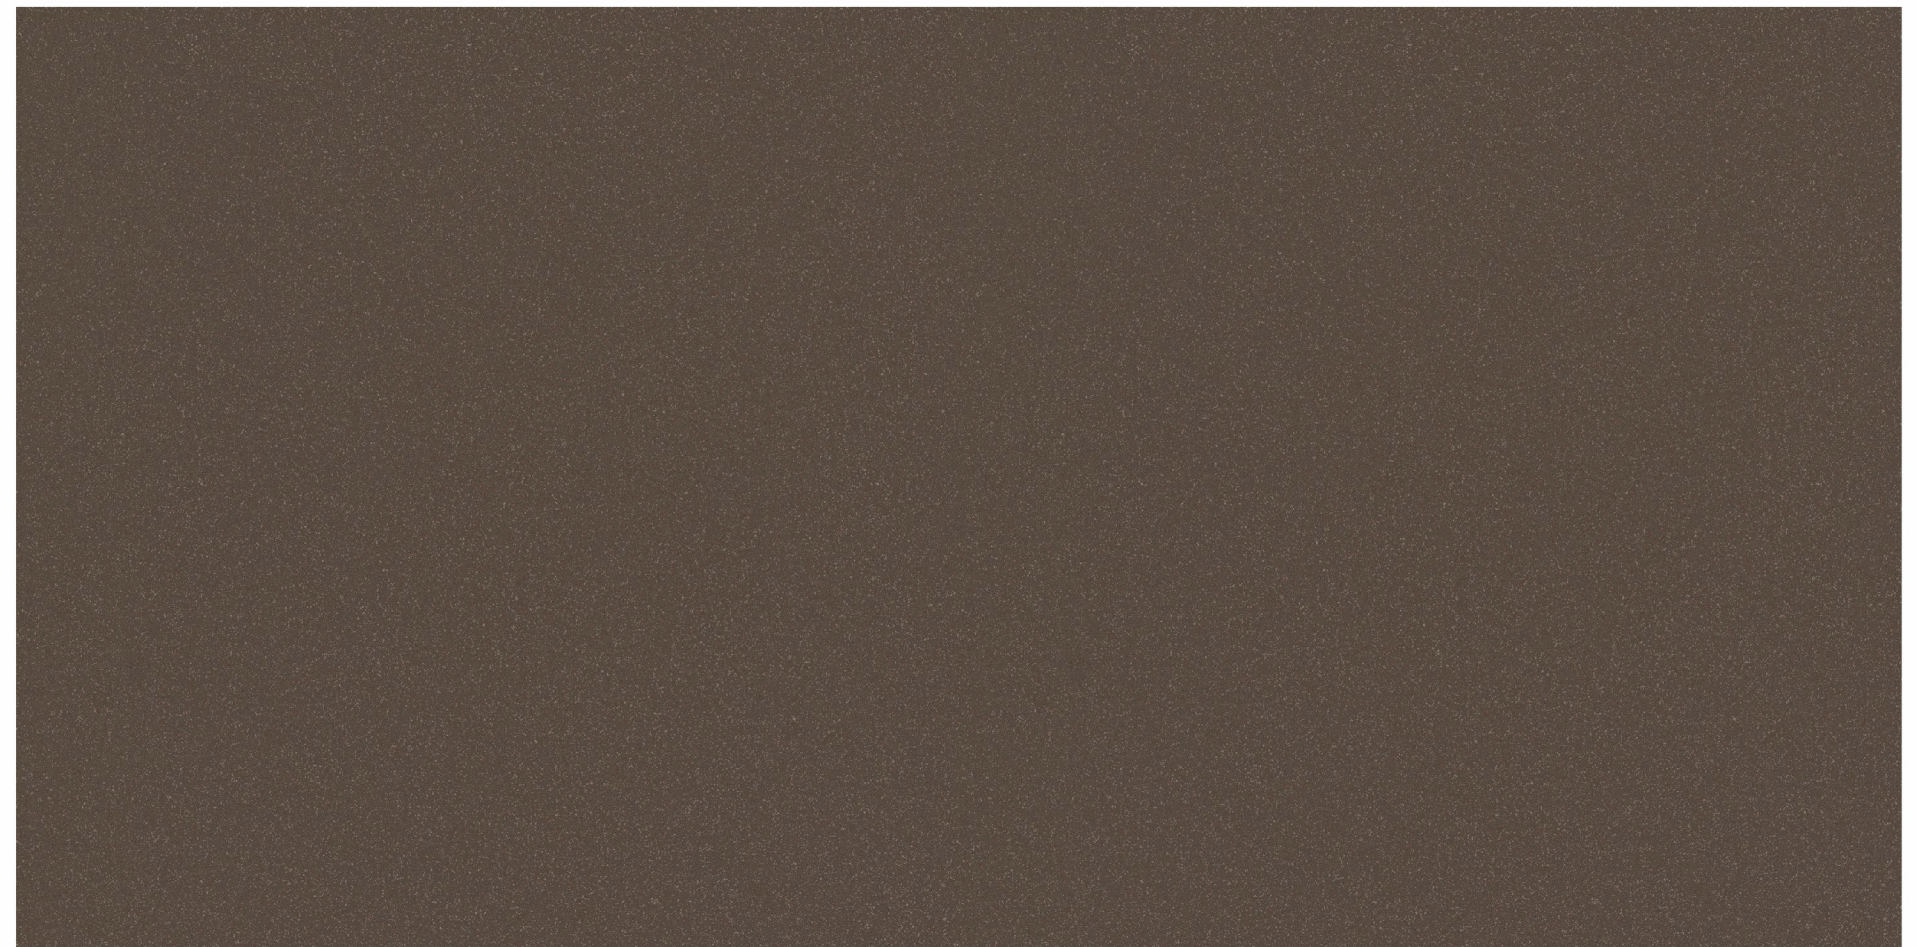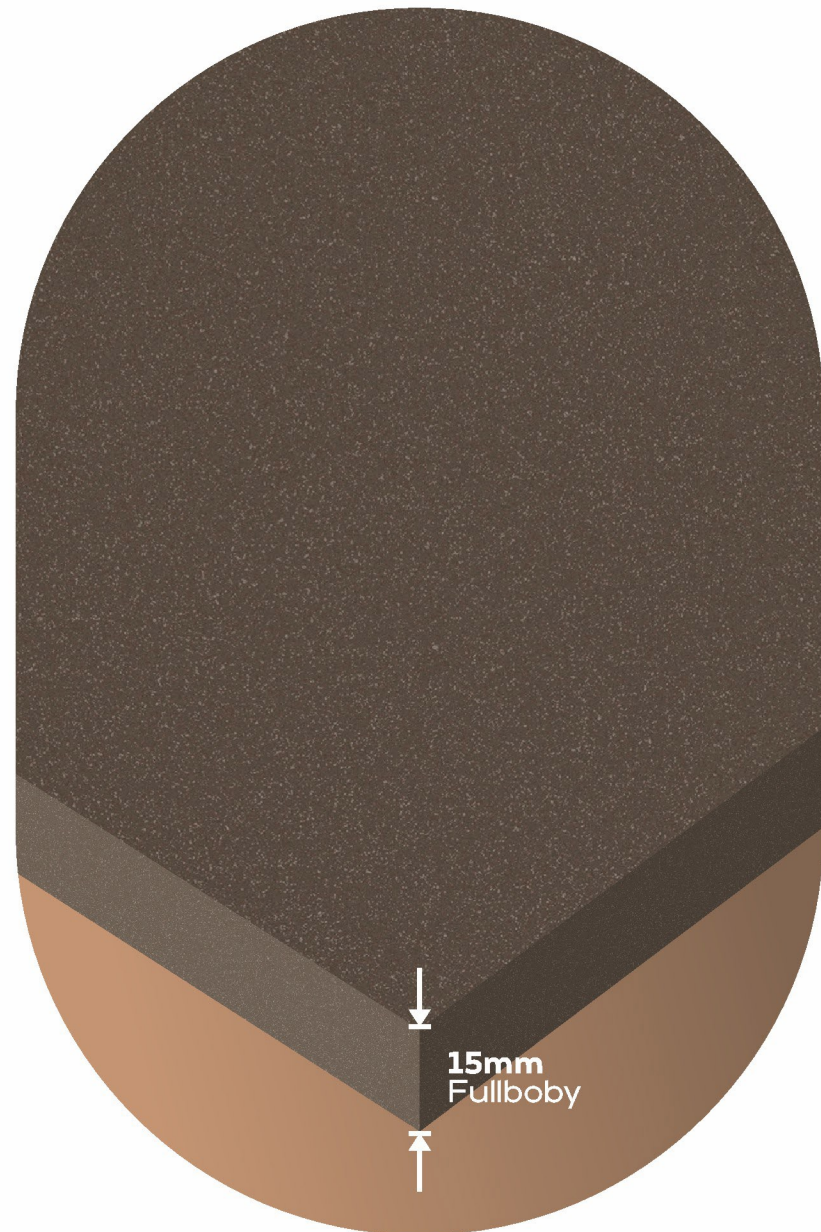




DENSE COFFEE - 600x1200mm

FULLBODY
TILES

600x1200mm


SURFACE.
SATIN




Weather
resistant



High tensile
strength





Stress-
resistant



Frost and
fire-resistant

www.velbonvitrified.com

DENSE NEGRO

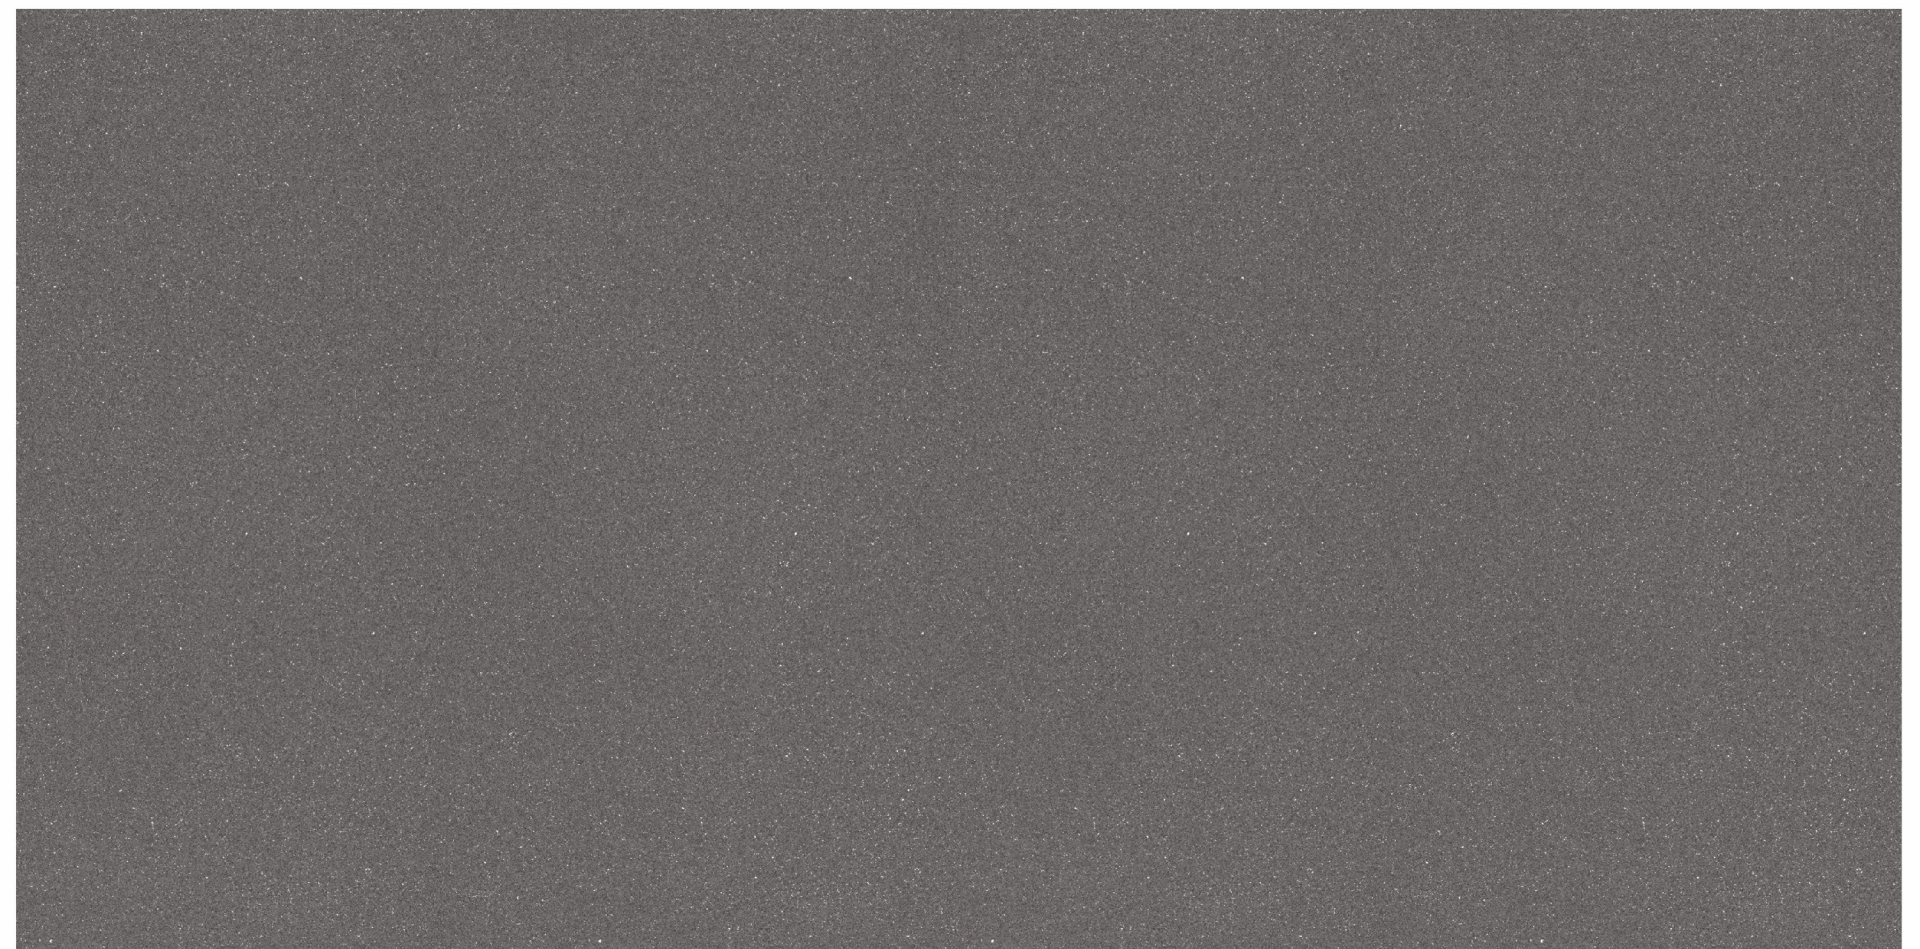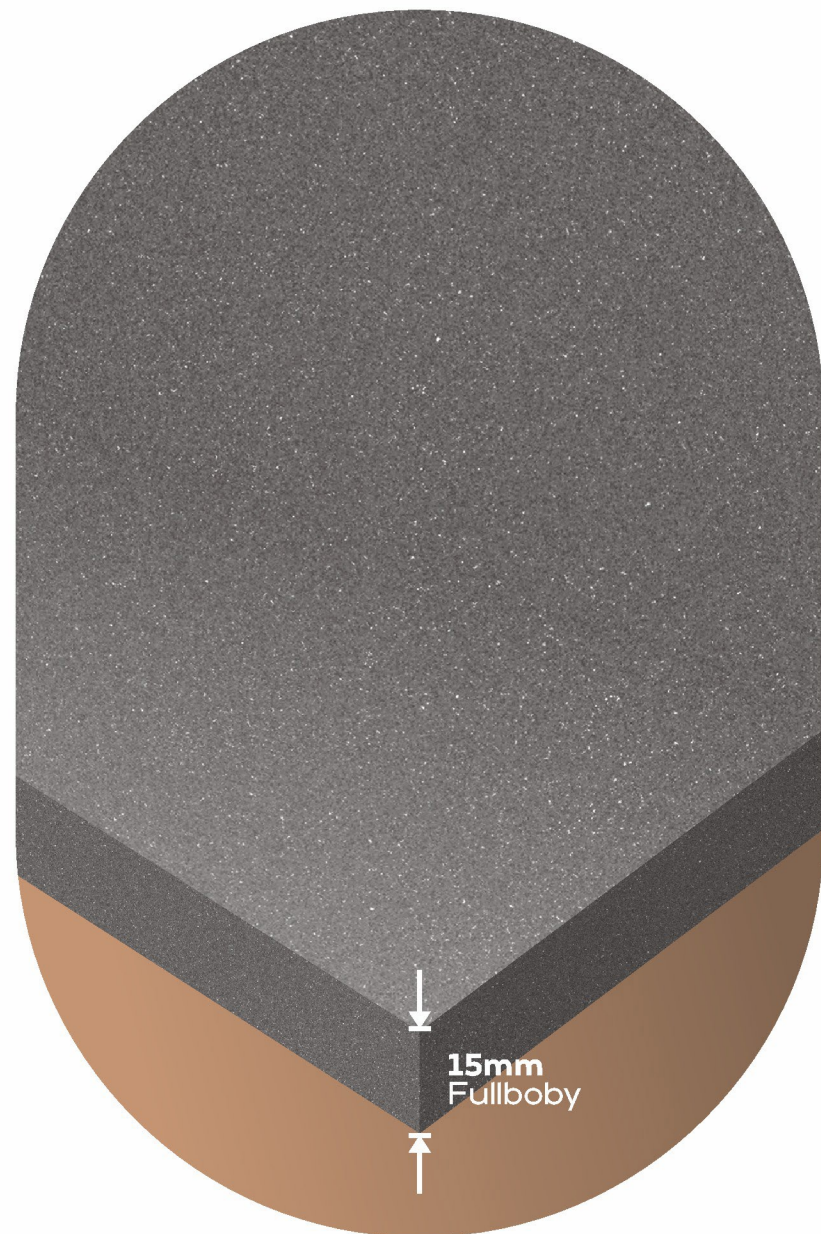



DENSE NEGRO - 600x1200mm

FULLBODY
TILES

600x1200mm


SURFACE.
SATIN



Weather
resistant



High tensile
strength



Stress-
resistant



Frost and
fire-resistant

www.velbonvitrified.com

DENSE VERDE



15mm
Fullbody




DENSE VERDE - 600x1200mm


FULLBODY
TILES

600x1200mm

SURFACE.
SATIN



www.velbonvitrified.com

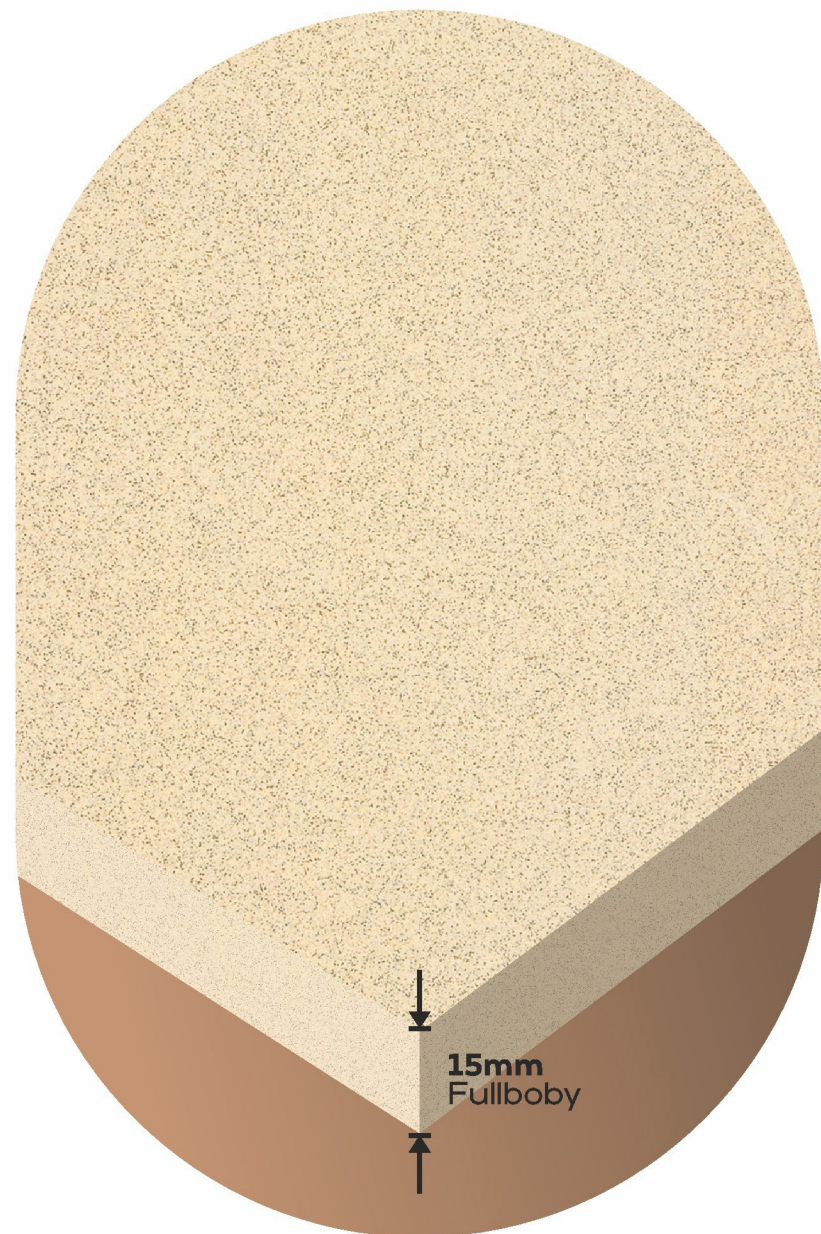

DENSE SAHARA





DENSE SAHARA - 600x1200mm


FULLBODY
TILES

600x1200mm

SURFACE.
SATIN



www.velbonvitrified.com

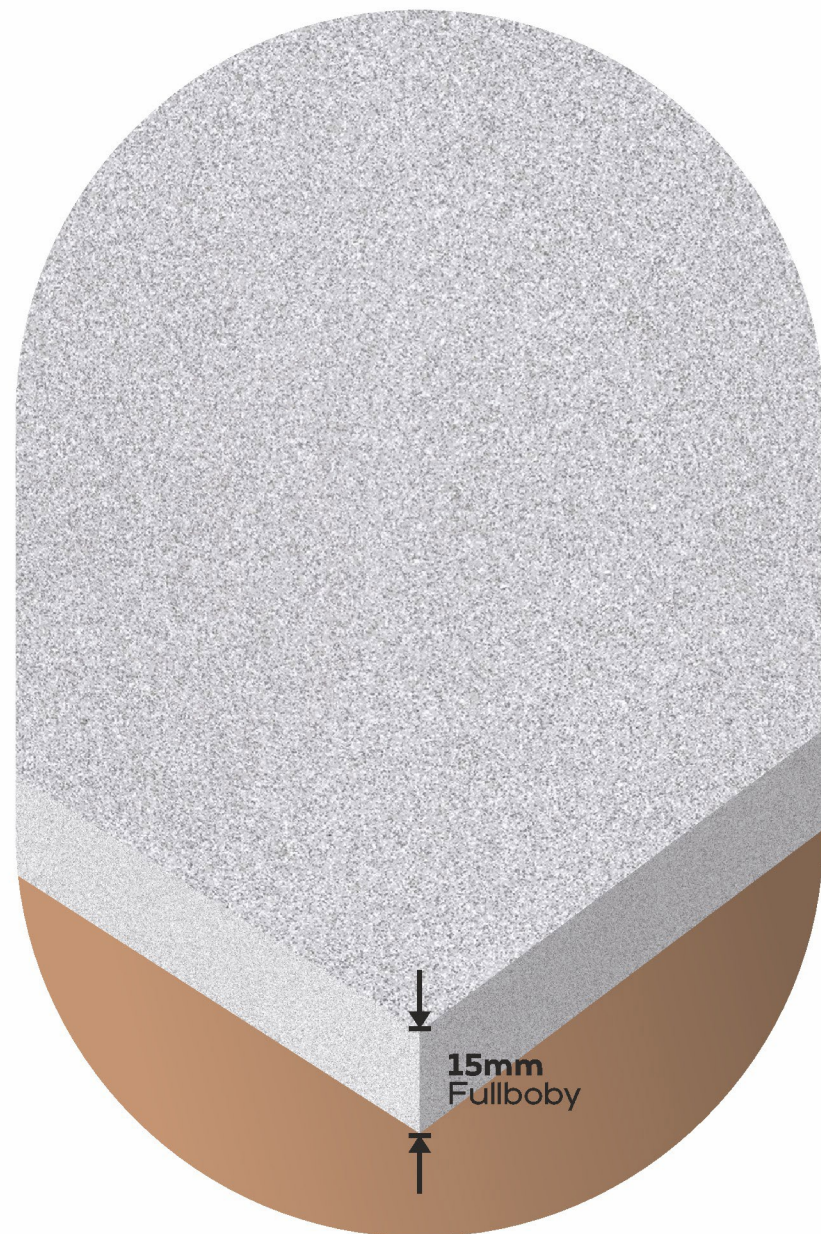

DENSE GREY





DENSE GREY - 600x1200mm

FULLBODY
TILES

600x1200mm


SURFACE.
SATIN



Weather resistant



High tensile strength




Stress-resistant



Frost and fire-resistant

www.velbonvitrified.com

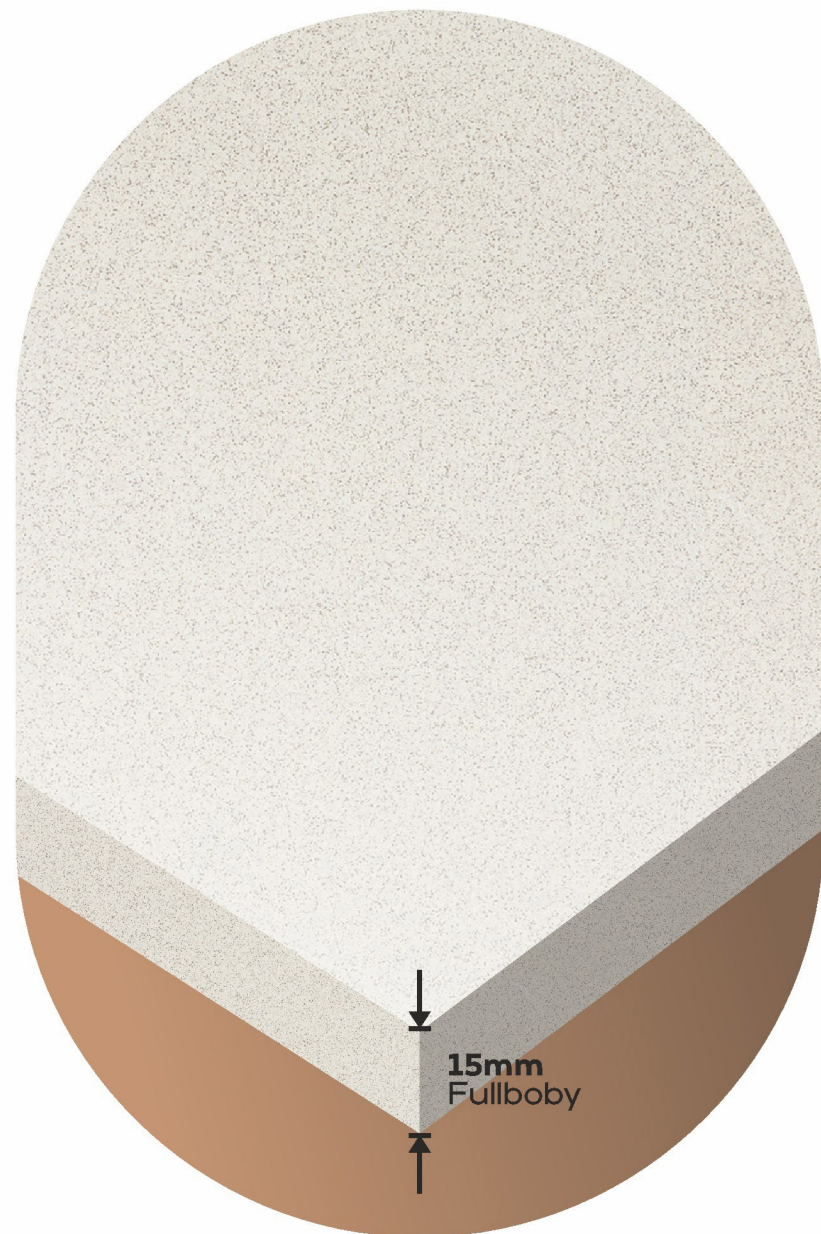

DENSE LUX






DENSE LUX - 600x1200mm

FULLBODY
TILES

600x1200mm


SURFACE.
SATIN



Weather
resistant



High tensile
strength




Stress-
resistant




Frost and
fire-resistant

www.velbonvitrified.com

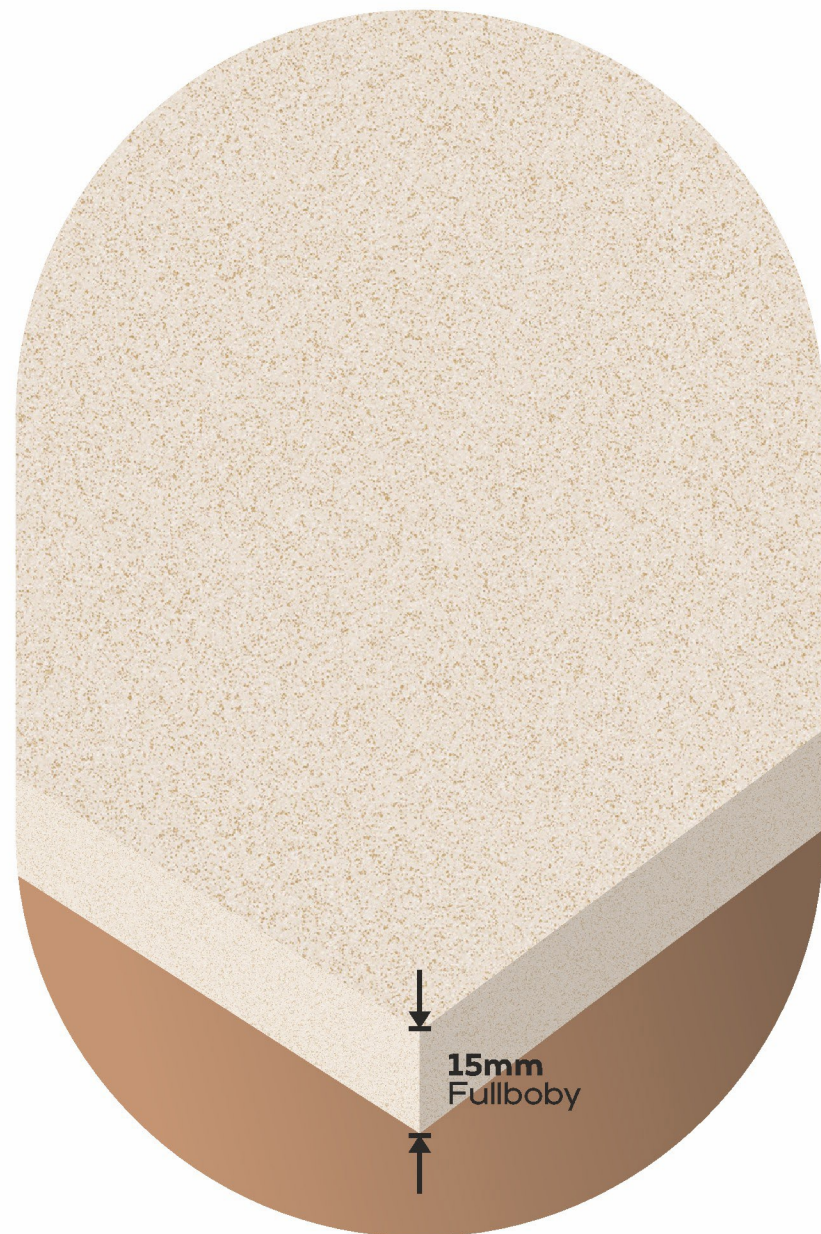

15mm
Fullbody

DENSE CREMA

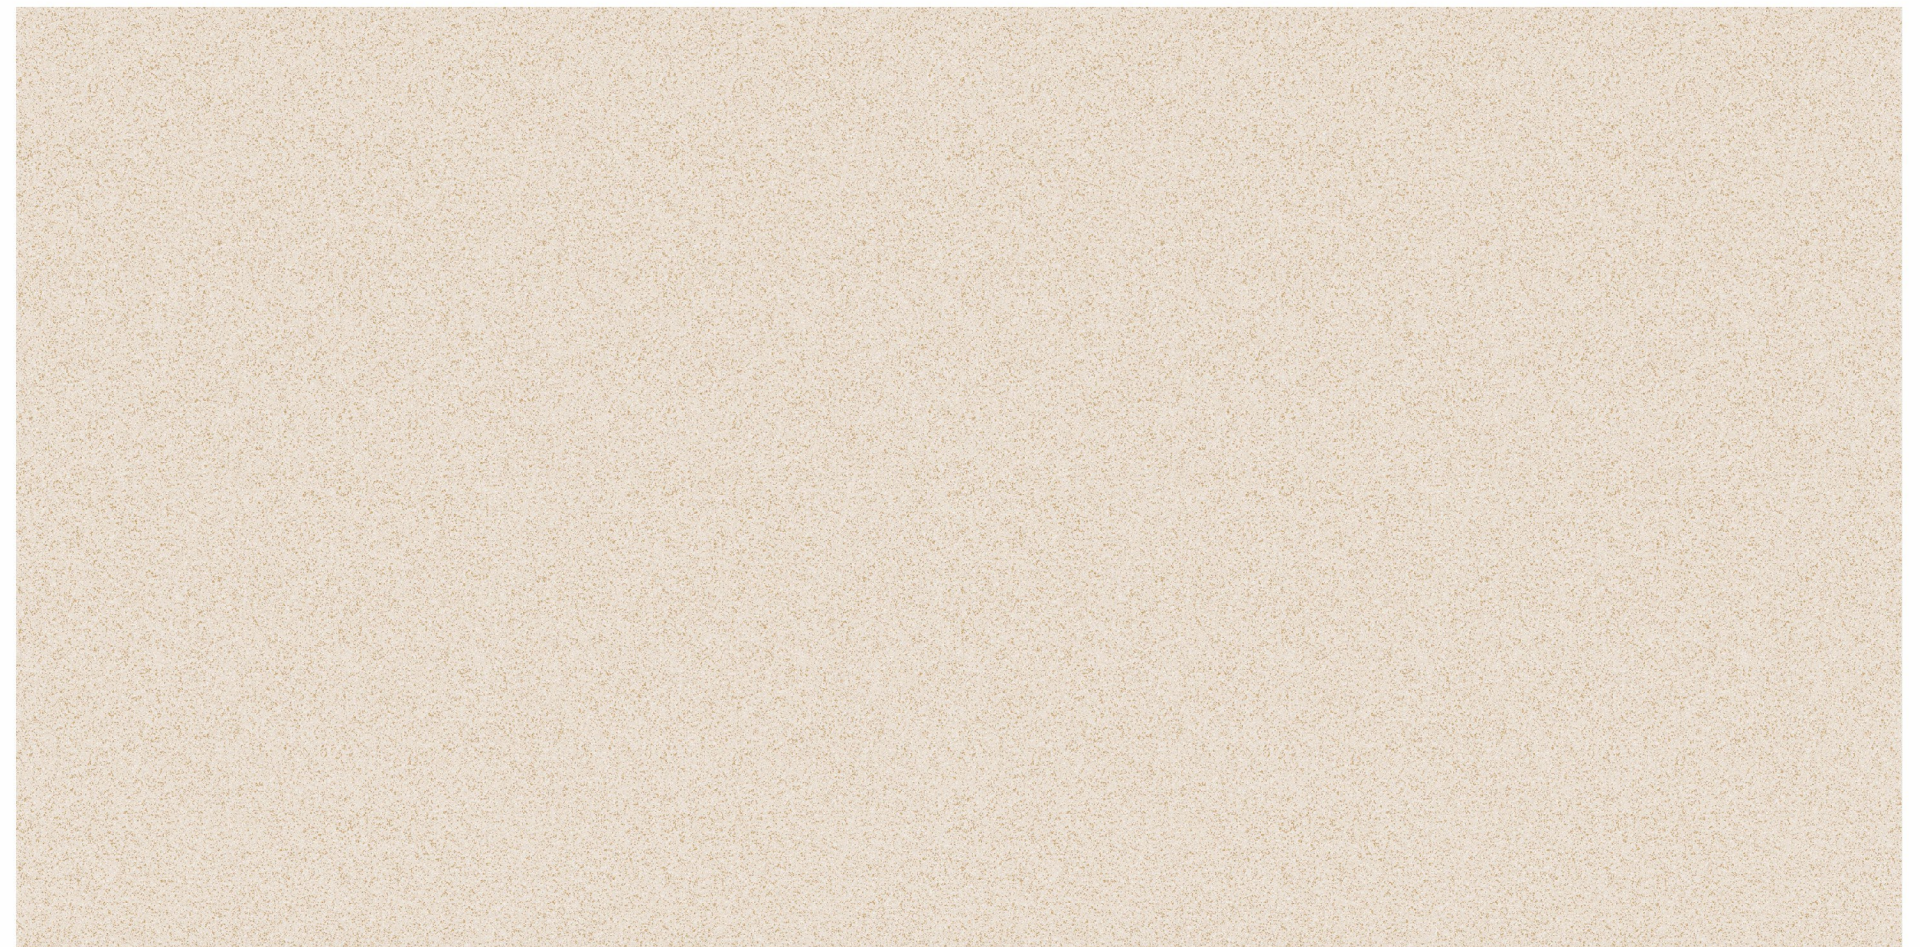



DENSE CREMA - 600x1200mm

TECHNICAL SPECIFICATION

Dimension and Surface Quality	Test Method	Require	Result
Deviation in Length (l) & Width (w)	ISO 10545 - 2	± 1mm	0.00 mm
Thickness	ISO 10545 - 2	± 0.5mm	0.00 mm
Straightness of sides	ISO 10545 - 2	± 0.8mm	0.09 mm
Rectangularity	ISO 10545 - 2	± 1.5mm	0.11 mm

Physical Property

Water Absorption %	ISO 10545 - 3	Less then 0.5	0.044 %
Breaking Strength	ISO 10545 - 4		7194.95 N
Modulus of Rupter (MOR)N/mm ²	ISO 10545 - 4	35	49.06 N/mm ²
Resistance to surface abrasion	ISO 10545-7		PEI Class - III 1500 Revolution pass
Coefficient of Liner Thermal Expansion	ISO 10545 - 8	9X10 ⁻⁶ Max	5.51x10 ⁻⁶
Thermalshock Resis	ISO10545 - 9	10 Cycle, Min	Confirm
Crazing Resistance	ISO 10545-11	No Crazin in Two Cycle	Confirm
Moisture Expansion (in mm/mm)	ISO 10545 -10	0.02 mm/m max	0.01 mm/m max
Impact resistance	ISO 10545 - 5	0.55 Min	0.78
Scrach hardness of Srface	ISO 13630 - 13	5 moh's scal	5 Moh's
Bulk density, lin (g/cc)	ISO 10545 - 3	2.2 m'n	2.2903 glcc

Chemical Property

Resistance to Stain	ISO 10545-14	Min Class - 3	Class - 5
Resistance to Low Concentration of acid and alkali	ISO 10545-13	Min Class-GLC	Class GLA

Packaging Details:

SIZE	THICKNESS	FINISH
600x1200mm	15MM	Satin

AVG WEIGHT	NO. TILES/BOX	COVERAGE /BOX
45kg. Approx	2 pcs	1.44 sq. mtr 15.5 sq ft

VELBON
VITRIFIED

VELBON VITRIFIED LLP

Unchi Mandal Village, Halvad Road,
Morbi, Gujarat.

www.velbonvitrified.com
velbonvitrified@gmail.com